

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
11 March 2004 (11.03.2004)

PCT

(10) International Publication Number
WO 2004/020102 A1

(51) International Patent Classification⁷: B02C 19/00 (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DB (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, LZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number: PCT/SE2003/001319

(22) International Filing Date: 27 August 2003 (27.08.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data: 0202534-4 28 August 2002 (28.08.2002) SE

(71) Applicant (for all designated States except US): SANDVIK AB [SE/SE]; S-811 81 Sandviken (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): DALLIMORE, Rowan [GB/GB]; 5 Charlton Park, Midsomer Norton, Radstock BA3 4BN (GB). LOVÉN, Björn [SE/SE]; Bodekullsgatan 33 A, S-2100 71 Malmö (SE).


(74) Agent: AWAPATENT AB; Box 5117, S-200 71 Malmö (SE).

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

{Continued on next page}

(54) Title: A MEMBER FOR HOLDING A WEAR PART OF A CRUSHER

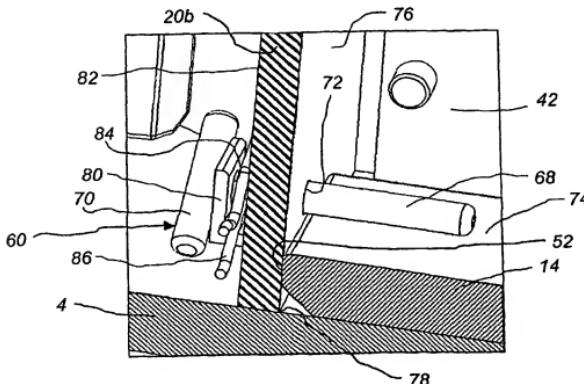

WO 2004/020102 A1

(57) **Abstract:** A holding member (60) for holding a horizontal wear plate (14) in position on a rotor for a vertical shaft impact crusher is disclosed. The holding member (60) comprises a holding part (68) for holding the wear plate (14) and a fixing means (86) for releasably fixing the holding member (60) to a vertical wall segment of said rotor such that the wear plate (14) bears against a first side (76) of said wall segment.